










TEX125-E

Available Tip Styles:

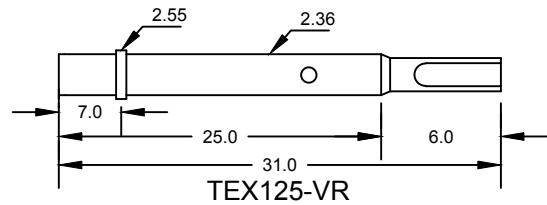

Available Receptacle:

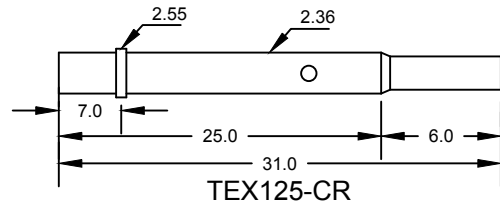

■ Mechanical

- Pitch: 3.17mm
- Recommended travel: 4.3mm
- Full travel: 6.3mm
- Spring force: 200g±5% at recommended travel

■ Material and plating

- Plunger: BeCu, Gold plated
- Barrel: Bronze, Gold plated
- Spring: Music Wire Gold plated
- Receptacle: Barss, Gold plated

■ Eletrical Specifications

- Current Rating: 5amps
- Resistance: Less than 50mΩ

■ Receptacle Specifications

- Mounting Hole Size: 2.40-2.45mm

	Name	Date	Description:	Scale:	
Drawn					
Approved					
Checked					
			Part NO:	TEX125-Series	Index:
					Size:
					A4